



Tuya Smart Quick operation manual

V1.0

CATALOG

- 1 Box contains
- 2 Install the camera
- 3 Download APP Tuya Smart and Register
- 4 How to Add Camera
- 5 Settings
- 6 Shared Device
- 7 FAQ
- 8 Tip


1. Box contains



2. Install the camera


The camera can be installed indoors and outdoors

① Fix the base of the bracket firmly to the wall where you want to install.

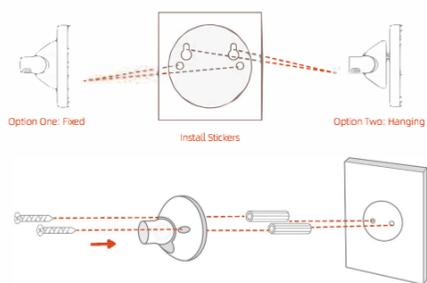


01

② Align the camera bracket port with the bracket and install it on the bracket, and adjust the camera viewing angle through the real-time video stream of Tuya Smart App.

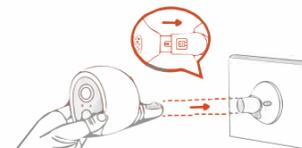


③ If you want to disassemble, just hold the buckle on the bracket.

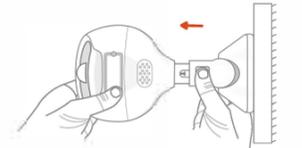

3. Download APP Tuya Smart and Register


① For IOS system, please search for "Tuya Smart" in App Store.
② For Android system, please search for "Tuya Smart" in the Google Play.

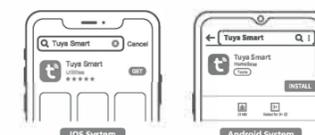

02

Register for an account



(1) Register for an account, using your mobile phone number or email number to register.
(2) After successful registration, log in to your account password.

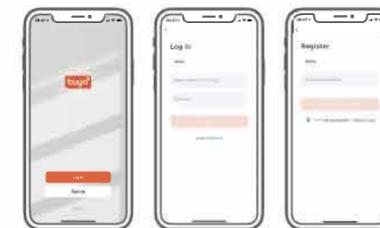


4. How to Add Camera

1. Press and hold down the power button at the bottom of the camera to start up. Then the camera plays a beep.
2. Click "Add Device" or "+" on the top right of the APP homepage to enter the Add Device page.
3. Enter the add interface, click "Security & Video Surveillance" -> Click "Smart Camera (Wi-Fi)"
4. Enter the add interface and click "Next"
5. Go to "Add WIFI" Enter the account number/password of WIFI connected to your phone, click "Next"
6. Enter the QR code interface, the mobile phone screen directly in front of the camera lens, the distance between the two is 10-20 cm, from far to near movement, try not to let the phone shake in the process, avoid reflecting light. When you hear the camera voice prompt, click "I Heard a Prompt"
7. Within 2 minutes, wait for the APP to adding device...
8. Go to page prompts that the addition is successful, click "Done"
9. Jump to the device list.

03

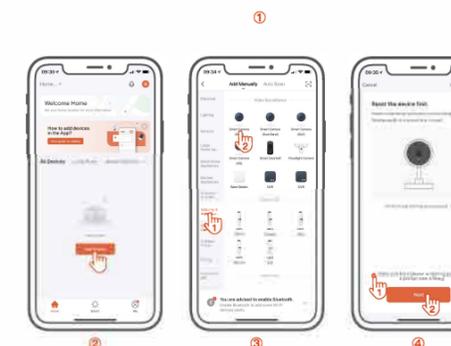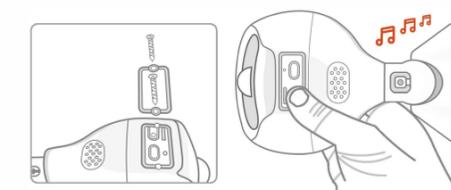


04

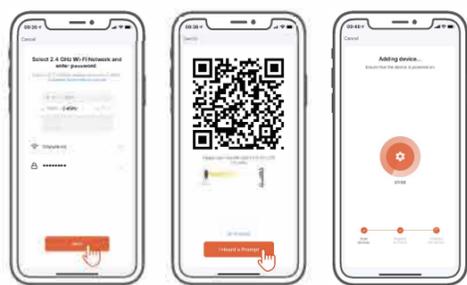

05

5. Settings

The Settings page is displayed, showing basic device information and setting basic functions such as PIR alarm. Basic Settings there are indicators, picture flipping, intercom function, infrared night vision, sound adjustment function Settings; Advanced Settings can be set up in the movement detection, PIR, power Settings; Other features include storage Settings and offline reminders.

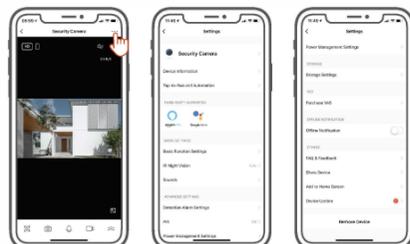


6. Shared Device

First, please inform your relatives and friends to download Tuya Smart App, and use their mobile phone number or email to complete the registration, and then send the registered account to you as a sharing account.

1. Click "..." in the upper right corner to enter the settings page.
2. Click "Share Device"
3. Click "Add Sharing"
4. Please use Tuya Smart Account to share the device, or you can share the camera through social software.
5. Enter the Tuya account of your relatives and friends, and click the "Done" button.

06

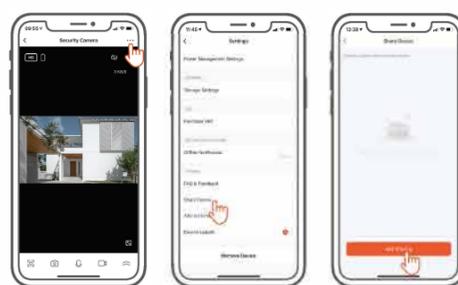

07

7. FAQ

1. What if the network connection fails?

A: If the camera is 100% connected to the network through the network cable, switch to the "wired network" add mode in the APP, and search for devices in the same LAN to add the camera.
B: If you use WIFI, make sure that the WIFI password is correct, do not insert the network cable, while listening to the camera to send power music, with the reset needle reset, choose to scan two-dimensional code to add, according to the prompt operation can, if there is strong electrical interference around, or WIFI usage peak, it is recommended to use network cable connection.
Note: First make sure that the camera is energized and that the camera is heard making music on and starting normally. The camera requires a standard power supply, and the mobile phone power supply cannot ensure the normal operation of the camera.

2. Is it normal for howling?

The camera is too close to the phone to turn on Speak (intercom function) camera audio and cell phone audio can interfere with each other, making interference sound, this does not affect the use, please extend the distance between the camera and the phone to eliminate interference.

3. Why does the camera have no sound when the phone and the camera are intertalking? Turn on the intercom button when you talk to your phone, and if your phone can't hear the camera, turn on the silent icon on your phone.

4. How to view the video of the camera, can I play it by taking out the card and inserting it into the computer?

After the camera is powered off, take out the TF card and plug it into the computer to play it back.

5. What is the problem with image pauses?

Camera needs a certain upload bandwidth to maintain a stable connection, recommended the camera is located on the network line bandwidth in 2M or more, mobile phone network downstream bandwidth is recommended 2M or more, if the camera is connected to WIFI, WIFI use of more people will also lead to image pause, it is recommended that the camera plug in the network line to try again.

08

6. Is it normal for the camera to sometimes enter slowly in the "connected" state when adding?

Is normal, because at this time the camera user information is being saved to the cloud service, which needs time to communicate with each other, if the mobile phone accidentally lost, replace the new phone as long as the login account unchanged, the camera all information does not need to be re-entered.

7. Precautions for camera maintenance.


If the image gradually blurs, you can wipe the lens with a soft cloth with alcohol to remove the stain image is clear. Camera horn alarm sound suggested not long term on, alarm sound will disturb the surrounding neighbors, but also affect the life of the horn.

8. Motion detection false alarm

Motion detection is whether the camera detection screen has changed, if there is a change when the alarm, is not detected when someone will alarm, light, tree shadow, flying animals, etc. will trigger the camera alarm, the way to avoid these problems is to set the PIR alarm.

8. Tip

After the camera is turned on, the network is not successfully connected, Please use the card removal pin to press and hold the reset hole in the figure, and hear the voice prompt from the camera. Wait for the camera to restart successfully, and the configuration camera network appears again.

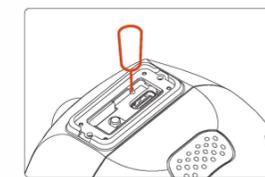

09